

3VHHFE NPCJMF 1\$

# M80J

ê 8JUI UIFB2VDPSF \*OUFM +"/41&QSP, &FTBDE 8XCE PQFSBUJOH TZTUFN  
. + QSFTFOUT BO PVUTUBOEJOH QFSGPSNBODF

ê %FTJHOFE GPS B SVH0IEBODRNQBNM BPEZ XJUI 1\$ NBUFSJBM PG CBDLQMBOF  
BOE 516 NBUFSJBM PG GSBNF GVMM QSPUFDUJPO GPS GPVS DPSOFST

ê 'VMMODN14 EJTQMBZ XJUI /JUT IJHI CSJHIUCQFBOMF BOE B QPJOU UPVDI  
QSMEJOH NFM0U SFBCEBSJVPJWIZBOEPVJBPST

ê \$PVQMF XJUI 7 N" I IJHI DBQBDJUZ EFUBDIBCMF CBUUFSZ . + FOTVSFT B MPOH MBTUJOH  
TUBCJMJUZ BOE FBTZ NPCJMF XPSL GPS NVMUJQMF TIJGUT



ê #VJMU JO () [ BOE () [ EVBM CBOE 8J'J FQTS FVVP DEJFODHU GFBOT WIOS BTQZB XIMSLQMBDFT

ê #VJMU JO ( ( ( BOE #MVFUPPUI DPNNVOMFD B GJR0MNPJE TBUFFM NDBLQFB SVOOJOH  
XJUI (14 (MPOBTT #FJEPV QSPWJEJOH BDDVSBUF OBWJHBUJPO BOE QPTJUJPOJOH

ê % CBSDPEF TDBO FOHJOF BOE /'\$ NPEVMFT GPS PQUJPOT

ê &YUFOTJWF JOUFSGBDFT TVDI B%.64# BJOJ5Z QPSS EBJOEF \$TF BQQMJDBUJPO  
TDFOBSJPT

ê 1BTTFE UIF \*1 BOE .\*- 45% ) UFTU QSFTFOUJOH TPMJE XBUFSQSPPG BOE EVTUQSPPG QFSGPSNB  
UIF IBSTI FOWJSPONFOU

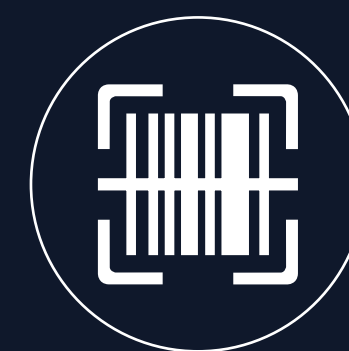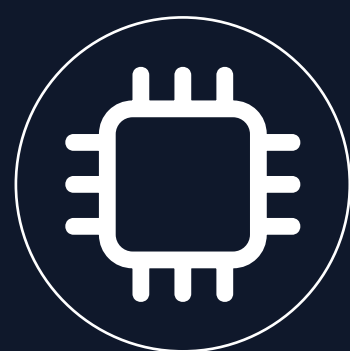

/ QSPDFTTPS 8JOEPXT JODI DE % CBSDPEF  
0QFSBUJOH 4ZTUNNEJTQMBZ #SJHIUOFTT TDBO FOHJOF



%VBM CBOE 8J'J N" I 'SPOU .1(14 (-0/"44 #FJEPV \*1  
3FBS .1

# M80J rugged mobile PC

## Specifications



 **CPU**  
N5100 processor


 **Operating System**  
windows 10 Home

 **Memory**  
RAM: 8GB LPDDR4x  
ROM: 128GB EMMC


 **Display**  
Type: IPS  
Size: 8 inch 16:10  
Resolution: 800\*1280  
Brightness: 700cd/m<sup>2</sup>  
Optional:1000cd/m<sup>2</sup>

 **Touch Panel**  
5 points Capacitive

 **Dimension/Weight**  
236.7\*155.7\*20.8mm  
818g

 **Buttons**  
Power \*1 (yellow)  
Volume+ \*1  
Volume- \*1  
P1 key\*1 (HOME key)  
F key \*1  
(Barcode Scanning, connected to GPIO)

 **Speaker**  
8Ω/1W Waterproof Speaker \*2

 **Battery**  
Removable Li-polyment Battery  
7.6V/5000mAh

 **Internet**  
4G/ Dual-band WiFi/ BT5.0


 **GPS**  
GPS/GLONASS/Beidou


 **NFC**  
Support

 **2D Code**  
Support

 **Certification**  
IP65

 **Adapter**  
DC 19V 3.42A dapter

 **Rugged Features**  
MIL-STD-810H: 1.22m drop  
Working temperature:  
-20 °C to 60 °C Storage  
temperature: -30 °C to 70 °C  
Humidity: 95% Non-  
Condensing

 **I/O Interface**  
USB 3.0 \*1  
Type C \*1  
Standard earjack \*1  
TF \*1 SIM card\*1  
DC 19V 3.42A jack x1  
HDMI 2.0a mini \*1  
12PIN Pogo Pin \*1



\* The technical specifications of this product are subject to change without prior notice



Tel: 400-830-4882

www.onerugged.com

inquiry@onerugged.com

Room 401, Building C, Chaojie Industrial Park, No. 1 Guanghui Road, Jinsha Community, Kengzi Street, Pingshan District, Shenzhen, China